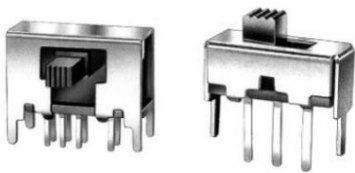


Application

- ✓ TV/Video, Audio, Home appliance, Precision apparatus,
Automotive, Office equipment, Communication,
Musical instruments, Industrial control



Feature

- ✓ Low profile slide switches available for various fields.

■Specification

Operating Temperature Range	-10 °C~70°C
Standard Contact Resistance	25mΩ max.
Operating Life Cycle	10,000 cycles

■How to order

SV70050F - 0202 - 6T - N

[Model](#)

Number of Pole & Position
Ex. 0202 – 2 poles 2 positions

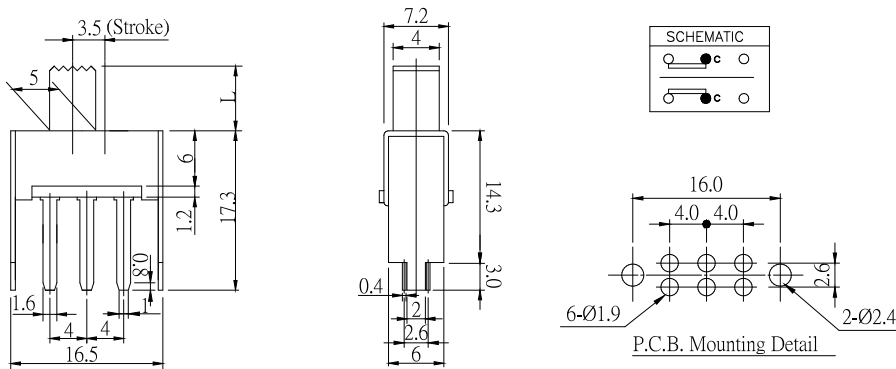
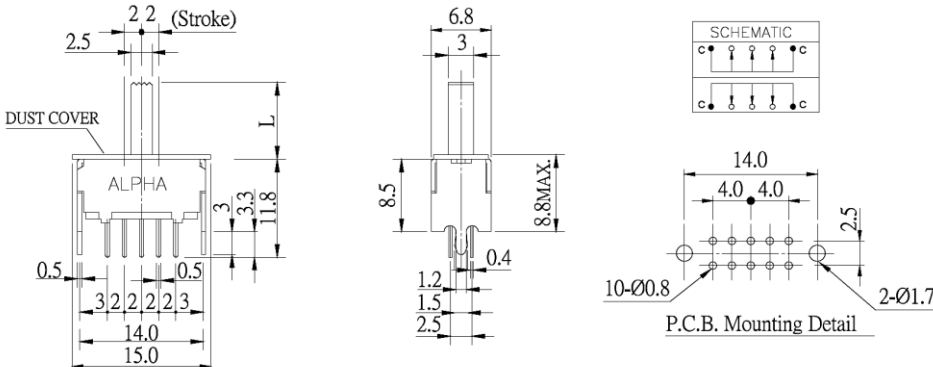
Lever Type

Timing


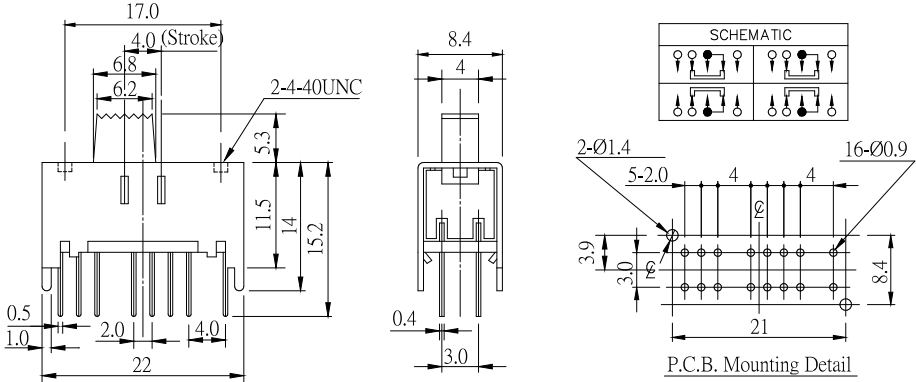

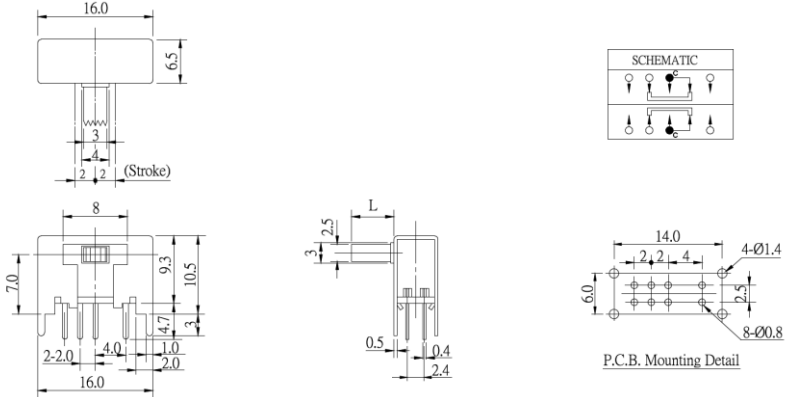

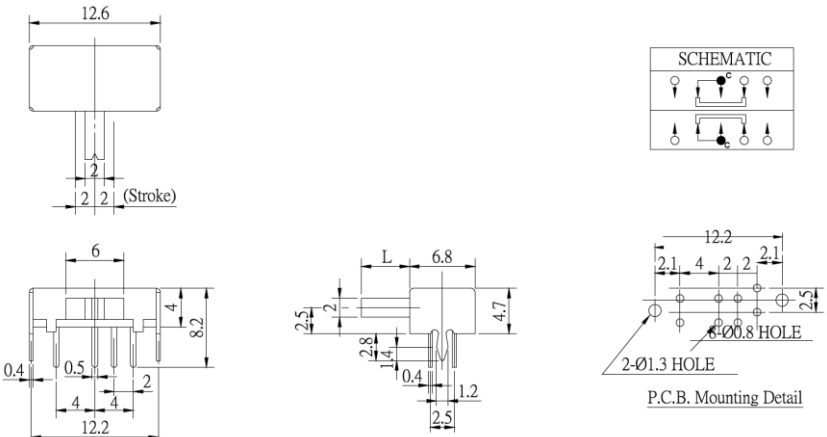
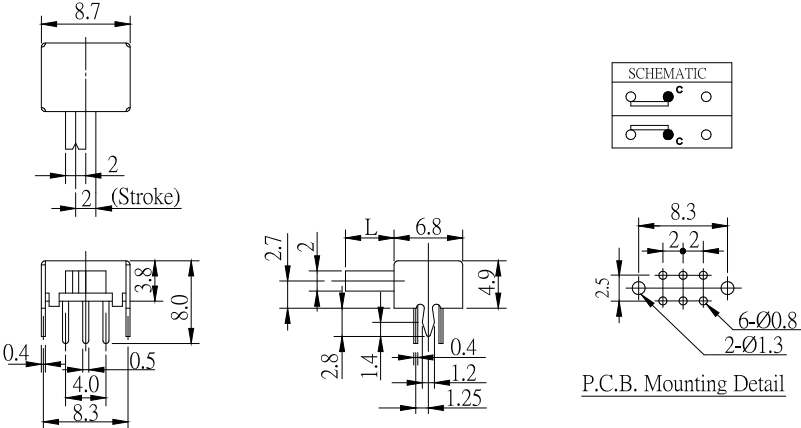
Order Code	Description
N	Non-shorting (break-before-make)
F	Free (Undefined)

■Model Description

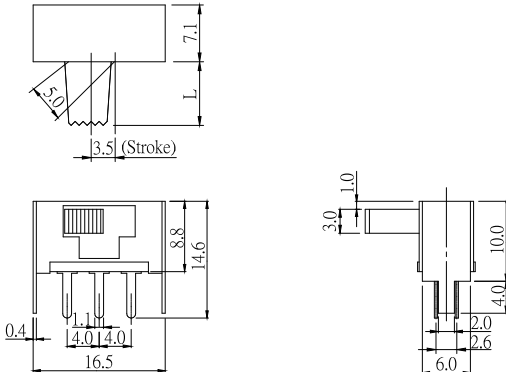

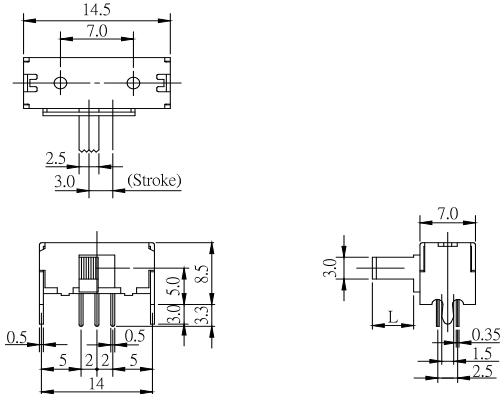

Model	Lever Length	Operating Direction	Rating	Timing
SS70020F-0202	4, 5, 6, 7.5, 10, 12, 14	Vertical	AC125V 0.3A	Non-shorting
SS71020F-0203	6, 9	Vertical	AC125V 0.3A	Non-shorting
SS84017F-0403	5.3	Vertical	AC125V 0.3A	Free
SV65020F-0203	6	Horizontal	AC125V 0.3A	Free
SV68010F-0203	4, 6	Horizontal	AC125V 0.3A	Free
SV69010F-0202	4, 6	Horizontal	AC125V 0.3A	Non-shorting
SV70050F-0202	6, 10, 20	Horizontal	AC125V 0.3A	Non-shorting
SV71010F-0202	6	Horizontal	DC30V 0.1A	Non-shorting

Order Code	Outline Drawing
SS70020F-0202-□T-021 	 3.5 (Stroke) 5 1 6 17.3 1.6 4 4 16.5 0.8 1.2 7.2 4 14.3 0.4 2 2.6 6 SCHEMATIC Q ● ○ ○ ● ○ 16.0 4.0 4.0 6-Ø1.9 2-Ø2.4 P.C.B. Mounting Detail
SS71020F-0203-□T-025 	 2.5 2.2 (Stroke) DUST COVER ALPHA L 3 3.3 11.8 0.5 3 2 2 2 2 3 14.0 15.0 6.8 3 8.5 8.8MAX. 1.2 1.5 2.5 0.4 SCHEMATIC c ○ ○ ○ c c ○ ○ ○ c 14.0 4.0 4.0 10-Ø0.8 2-Ø1.7 P.C.B. Mounting Detail

[Back to top](#)

Order Code	Outline Drawing
SS84017F-0403-□T	  17.0 4.0 (Stroke) 6.8 6.2 2-4-40UNC 5.3 11.5 14 15.2 0.5 1.0 2.0 4.0 22 8.4 4 0.4 3.0 SCHEMATIC 2-Ø1.4 5-2.0 4 4 16-Ø0.9 3.9 3.0 21 8.4 P.C.B. Mounting Detail
SV65020F-0203-□H-01	  16.0 6.5 3 4 2 (Stroke) 8 7.0 9.3 10.5 4.7 3 2-2.0 4.0 1.0 2.0 16.0 L 3 2.5 0.5 0.4 2.4 SCHEMATIC 14.0 2 2 4 4-Ø1.4 6.0 8-Ø0.8 P.C.B. Mounting Detail
SV68010F-0203-□V	  12.6 2 2 (Stroke) 6 4 8.2 0.4 0.5 2 4 4 12.2 L 6.8 2.5 2 2.8 1.4 0.4 1.2 2.5 SCHEMATIC 12.2 2.1 4 2 2 2.1 6-Ø0.8 HOLE 2-Ø1.3 HOLE P.C.B. Mounting Detail
SV69010F-0202-□V	  8.7 2 2 (Stroke) 3.8 8.0 0.4 4.0 0.5 8.3 2.7 2 L 6.8 4.9 2.8 1.4 0.4 1.2 1.25 SCHEMATIC 8.3 2.2 2.2 2.5 6-Ø0.8 2-Ø1.3 P.C.B. Mounting Detail

[Back to top](#)

Order Code	Outline Drawing		
SV70050F-0202-□T			 SCHEMATIC P.C.B. Mounting Detail
SV71010F-0202-□T			 SCHEMATIC P.C.B. Mounting Detail

[Back to top](#)

Design and specifications presented here are for the standard parts only. Please kindly contact us for your special requests and ask for the current technical specifications before purchase and/or use.

[Back to top](#)