

## Low-Profile Slide Series

### Application

- ✓ Audio, Home appliance, Lighting control, ect.

### Feature

- ✓ Smooth slide feeling



### ■Specification

Operating Temperature Range	-10 °C~70°C
Standard Resistance Tolerance	±20%
Insulation Resistance	100 MΩ Min. at 250V DC
Dielectric Strength	1 minute at 300V AC
Travel Distance	20mm, 30mm
Operating Force	30~250 gf.cm
Sliding Life	15,000 cycles

### ■How to order

RA2031F-20 – 15CA - B10K - 01

[Model](#)

[Lever Type](#)

#### Taper and Resistance Value

Ex:

Order Code	Taper	Resistance Value
A100K	Log/A	100KΩ
B10M	Linear/B	10KΩ

Taper: A and B

Resistance Value: 1KΩ to 500KΩ and 1MΩ

\*Contact us for other requirements.


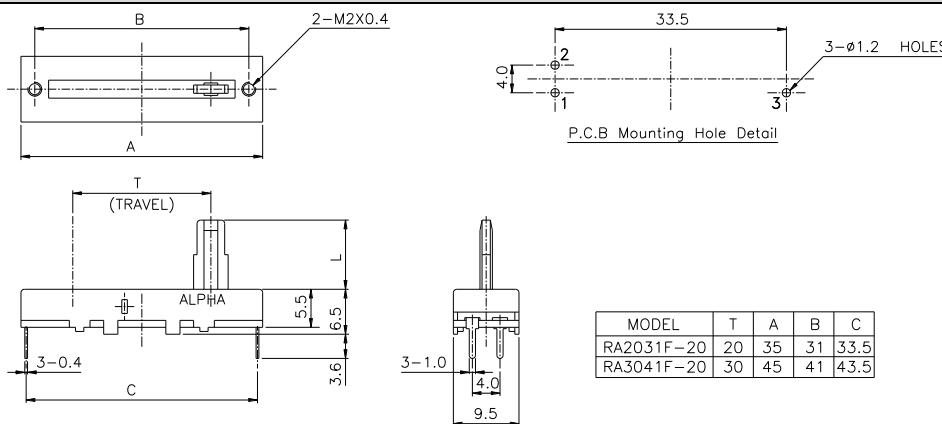

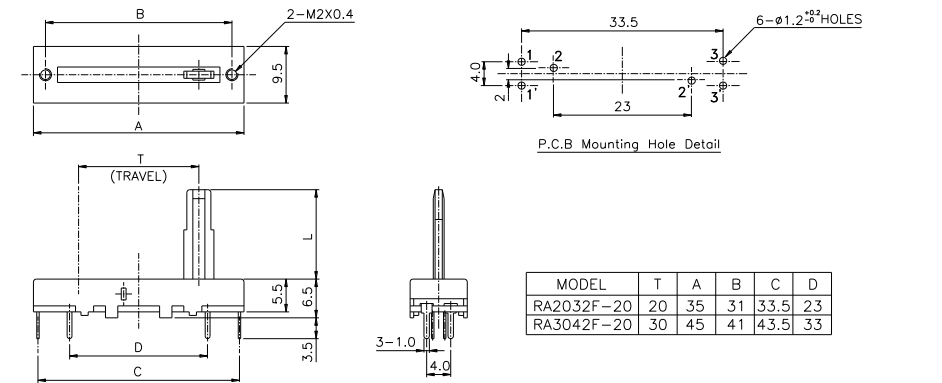

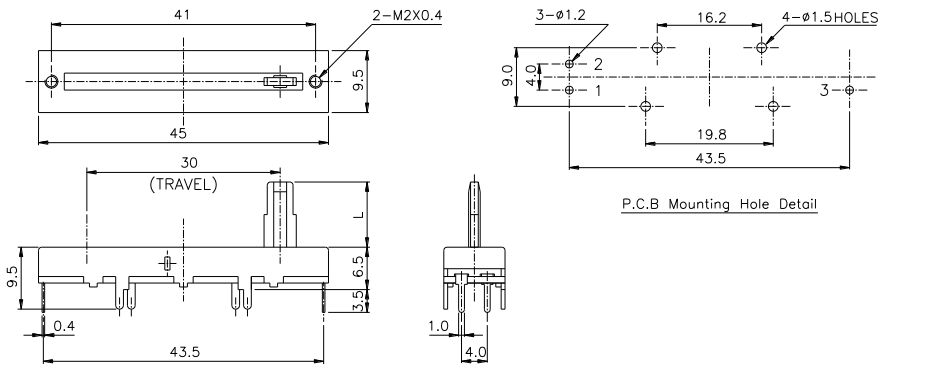
#### Click and Dust Cover

Order Code	Description
01	With dust cover
C	With center click
C1	With center click and dust cover
Blank	Without center click and dust cover

## Low-Profile Slide Series




### Model Description

Model	Number of Unit	Travel Distance	Type of Terminal	Tap	Mounting Height
<a href="#">RA2031F-20</a>	Single unit	20mm	PC board (vertical)	N/A	6.5mm
<a href="#">RA3041F-20</a>	Single unit	30mm	PC board (vertical)	N/A	6.5mm
<a href="#">RA2032F-20</a>	Dual unit	20mm	PC board (vertical)	N/A	6.5mm
<a href="#">RA3042F-20</a>	Dual unit	30mm	PC board (vertical)	N/A	6.5mm
<a href="#">RA3041F-202</a>	Single unit	30mm	PC board (vertical)	N/A	6.5mm

Order Code	Outline Drawing																		
RA2031F-20 RA3041F-20 	 <table><tr><th>MODEL</th><th>T</th><th>A</th><th>B</th><th>C</th></tr><tr><td>RA2031F-20</td><td>20</td><td>35</td><td>31</td><td>33.5</td></tr><tr><td>RA3041F-20</td><td>30</td><td>45</td><td>41</td><td>43.5</td></tr></table>	MODEL	T	A	B	C	RA2031F-20	20	35	31	33.5	RA3041F-20	30	45	41	43.5			
MODEL	T	A	B	C															
RA2031F-20	20	35	31	33.5															
RA3041F-20	30	45	41	43.5															
RA2032F-20 RA3042F-20 	 <table><tr><th>MODEL</th><th>T</th><th>A</th><th>B</th><th>C</th><th>D</th></tr><tr><td>RA2032F-20</td><td>20</td><td>35</td><td>31</td><td>33.5</td><td>23</td></tr><tr><td>RA3042F-20</td><td>30</td><td>45</td><td>41</td><td>43.5</td><td>33</td></tr></table>	MODEL	T	A	B	C	D	RA2032F-20	20	35	31	33.5	23	RA3042F-20	30	45	41	43.5	33
MODEL	T	A	B	C	D														
RA2032F-20	20	35	31	33.5	23														
RA3042F-20	30	45	41	43.5	33														
RA3041F-202 																			

## Low-Profile Slide Series

### ■ Lever Type

Model	RA2031F, RA3041F, RA2032F, RA3042F				
Lever Type	CA		DA		BA
Dimension	Insulated lever 		Insulated lever 		Insulated lever 
Length(L)	15		10	15	20
					5

Design and specifications presented here are for the standard parts only. Please kindly contact us for your special requests and ask for the current technical specifications before purchase and/or use.

[Back to top](#)