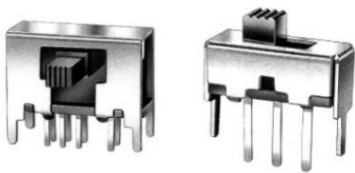


Application

- ✓ TV/Video, Audio, Home appliance, Precision apparatus,
Automotive, Office equipment, Communication,
Musical instruments, Industrial control



Feature

- ✓ Low profile slide switches available for various fields.

■Specification

Operating Temperature Range	-10 °C~70°C
Standard Contact Resistance	25mΩ max.
Operating Life Cycle	10,000 cycles

■How to order

SV70050F - 0202 - 6T - N

[Model](#)

Number of Pole & Position
Ex. 0202 – 2 poles 2 positions





Lever Type

Timing

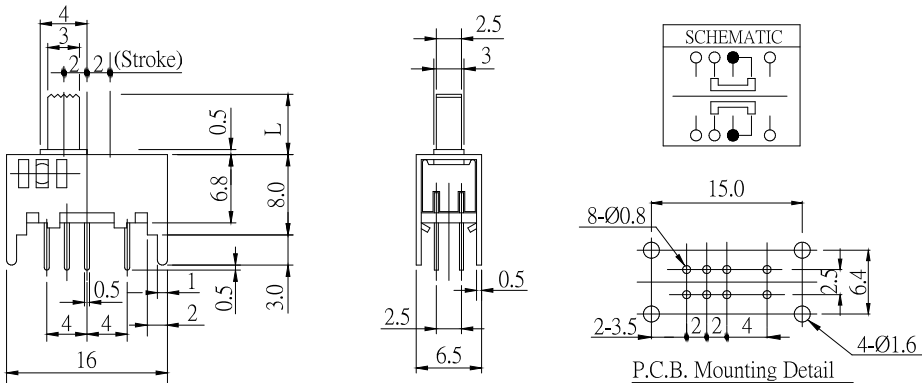

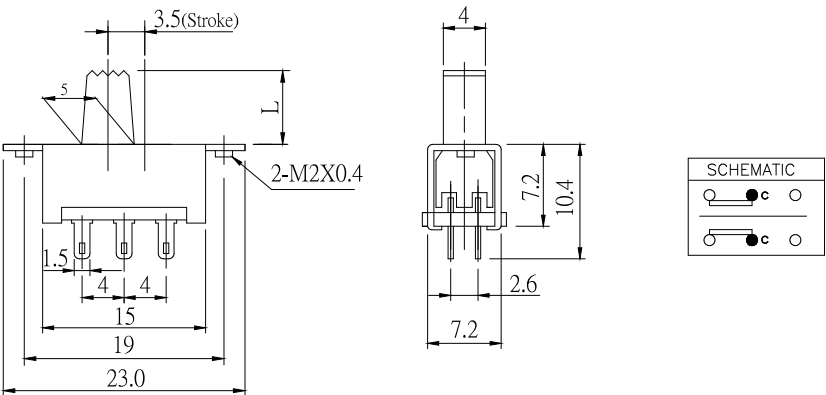
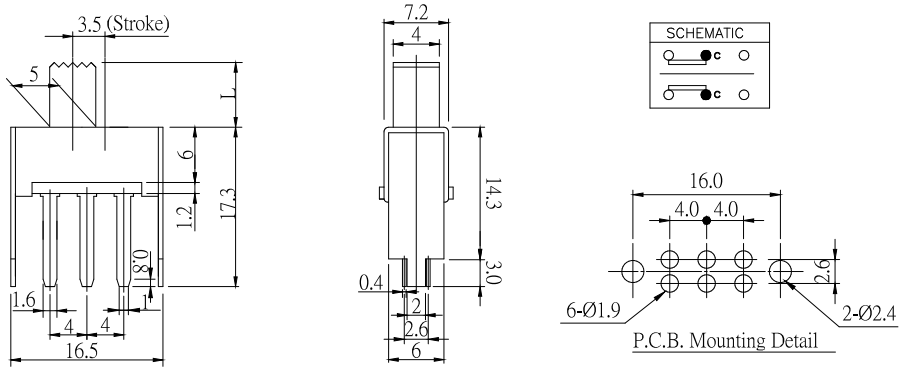

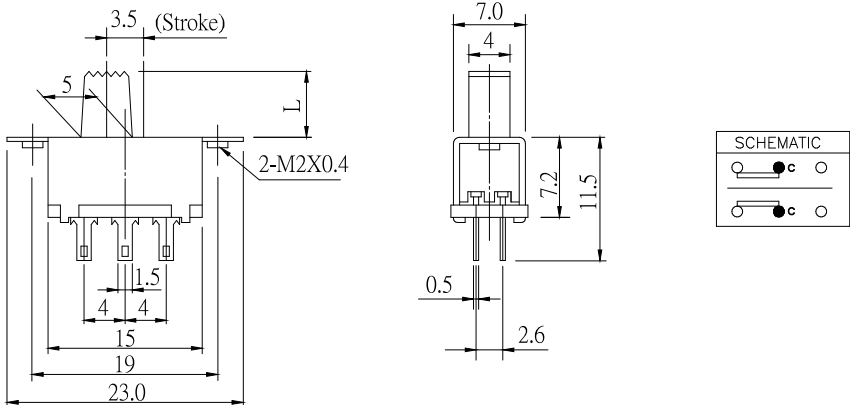
Order Code	Description
N	Non-shorting (break-before-make)
F	Free (Undefined)

■Model Description

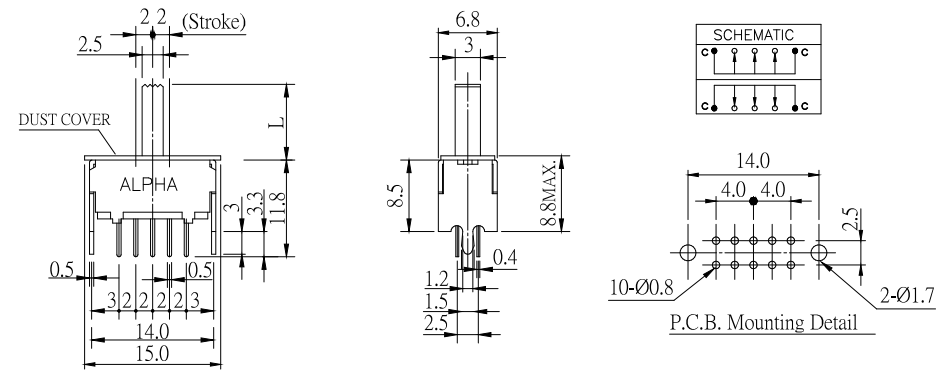

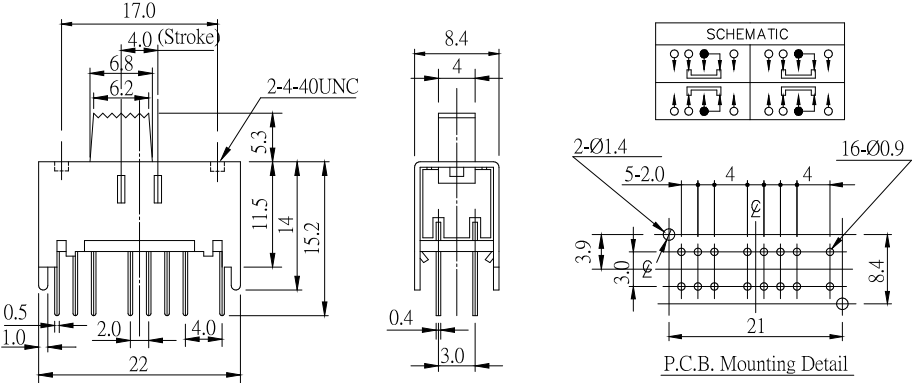

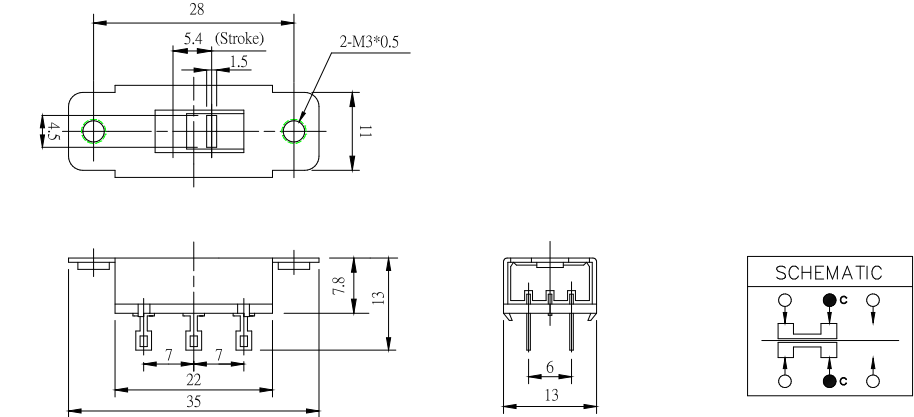

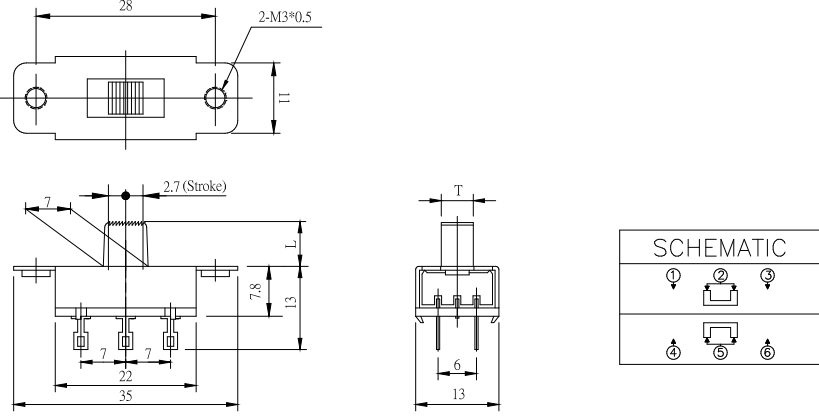
Model	Lever Length	Operating Direction	Rating	Timing
SS57010F-0102	2.5	Vertical	AC125V 0.3A	Non-shorting
SS65010F-0203	4.5, 9	Vertical	DC50V 0.5A	Free
SS70010F-0202	3.5, 4, 5, 6, 7.5, 8.5,	Vertical	AC125V 0.3A	Non-shorting
SS70020F-0202	10, 12, 14	Vertical	AC125V 0.3A	Non-shorting
SS71020F-0203	6, 9	Vertical	AC125V 0.3A	Non-shorting
SS84017F-0403	5.3	Vertical	AC125V 0.3A	Free
SS13010F-0202	0, 8, 10	Vertical	AC125V 0.3A	Non-shorting
SS13010F-0203	8, 10	Vertical	AC125V 0.3A	Non-shorting
SV65020F-0203	6	Horizontal	AC125V 0.3A	Free
SV68010F-0203	4, 6	Horizontal	AC125V 0.3A	Free
SV69010F-0202	4, 6	Horizontal	AC125V 0.3A	Non-shorting
SV70050F-0202	6, 10, 20	Horizontal	AC125V 0.3A	Non-shorting
SV71010F-0202	6	Horizontal	DC30V 0.1A	Non-shorting

Order Code	Outline Drawing
SS57010F-0102-2.5T	    

[Back to top](#)

Order Code	Outline Drawing
SS65010F-0203-□H	  Top view dimensions: 16, 4, 4, 4, 2, 0.5, 1, 0.5, 3.0, 8.0, 6.8, 0.5, 2, 2 (Stroke), 3, 4. Side view dimensions: 2.5, 3, 0.5, 6.5. P.C.B. Mounting Detail: 15.0, 8-Ø0.8, 2-3.5, 2, 2, 4, 2.5, 6.4, 4-Ø1.6. SCHEMATIC: Shows a single switch with one common terminal and two normally open terminals.
SS70010F-0202-□T	  Top view dimensions: 23.0, 19, 15, 4, 4, 1.5, 2-M2X0.4, 3.5 (Stroke), 5, L. Side view dimensions: 4, 7.2, 10.4, 2.6, 7.2. P.C.B. Mounting Detail: 16.0, 4.0, 4.0, 2.6, 2-Ø2.4, 6-Ø1.9. SCHEMATIC: Shows a single switch with one common terminal and two normally open terminals.
SS70020F-0202-□T-021	  Top view dimensions: 16.5, 8.0, 1.2, 6, 17.3, 1.6, 4, 4, 3.5 (Stroke), 5, L. Side view dimensions: 7.2, 4, 14.3, 3.0, 0.4, 2.6, 6. P.C.B. Mounting Detail: 16.0, 4.0, 4.0, 2.6, 2-Ø2.4, 6-Ø1.9. SCHEMATIC: Shows a single switch with one common terminal and two normally open terminals.
SS70010F-0202-□T-011	  Top view dimensions: 23.0, 19, 15, 4, 4, 1.5, 2-M2X0.4, 3.5 (Stroke), 5, L. Side view dimensions: 7.0, 4, 11.5, 7.2, 0.5, 2.6. P.C.B. Mounting Detail: 16.0, 4.0, 4.0, 2.6, 2-Ø2.4, 6-Ø1.9. SCHEMATIC: Shows a single switch with one common terminal and two normally open terminals.

[Back to top](#)

Order Code	Outline Drawing
SS71020F-0203-□T-025	 
SS84017F-0403-□T	 
SS13010F-0202-0	 
SS13010F-0203-□T	 






[Back to top](#)

SLIDE SWITCH



Order Code	Outline Drawing		
SV65020F-0203-□H-01			
SV68010F-0203-□V			
SV69010F-0202-□V			
SV70050F-0202-□T			

[Back to top](#)

Order Code	Outline Drawing
SV71010F-0202-□T	  SCHEMATIC   P.C.B. Mounting Detail

Design and specifications presented here are for the standard parts only. Please kindly contact us for your special requests and ask for the current technical specifications before purchase and/or use.

[Back to top](#)